

ROOM THERMOSTATS

ROOM THERMOSTAT SERIES TMA110

ESBE thermostat Series TMA110 consists of range of electro-mechanical room thermostats with gas filled bellow for use in heating or cooling applications.



TMA111



TMA112



TMA113

APPLICATION

The ESBE series TMA 110 is a range of ON/OFF electro-mechanical room thermostats for use in heating or cooling applications. The thermostats can be connected to 2-point or spring return actuator, a circulation pump or directly to a boiler.

VERSIONS

The series consist of 3 different versions:

- TMA111 TMA111 is a thermostat for use in heating application. The regulating temperature range is between 8°C and 30°C and is set by the knob. A pin stop system can limit the set-point range. The contact rating is 16(2,5)A@250V AC.
- TMA112 is a thermostat for use in heating application with an ON/OFF switch and light indication. The regulating temperature range is between 8°C and 30°C and is set by the knob. A pin stop system can limit the set-point range. The light is on when the relay is active and must be powered with 230V AC. The contact rating is 5(2,5)A@250V AC.
- TMA113 is a thermostat for use in heating or cooling application with a switch to decide heating or cooling mode and light indication. The regulating temperature range is between 8°C and 30°C and is set by the knob. A pin stop system can limit the set-point range. The light is on when the relay is active and must be power with 230V AC. The contact rating is 5(2,5)A@250V AC.

TECHNICAL DATA

Ambient temperature: _____ max. 40°C
 _____ min. 0°C
 Ambient humidity: _____ 20...80% RH non-condensating
 Regulating range: _____ see table
 Sensor type: _____ Gas filled bellow
 Differential/ hysteresis: _____ <1°K
 ErP Temperature controls class: _____ I
 Energy efficiency contribution: _____ 1%
 Enclosure rating: _____ IP30
 Contact rating — TMA111: _____ 16(2,5)A @ 250V AC
 TMA112: _____ 5(2,5)A @ 250V AC
 TMA113: _____ 16(2,5)A @ 250V AC
 Protection class: _____ II
 Material
 Housing: _____ ABS plastic self-extinguishing VO

Conformities and certificates:


CE LVD 2006/95/EC
 EMC 2004/108/EC
 RoHS 2011/65/EU

SUITABLE ESBE ACTUATORS


Series	Control signal	ARA600	90	ARC300	ARD100	ARD200	ALG400	VZC/VZD	MBA100	ZRS100
TMA111, TMA112, TMA113	2-point	ARA6x5, ARA6x6, ARA6x7, ARA6x8	M97, M98	ARC361, ARC363	ARD155, ARD157	ARD255, ARD257	ALG434, ALG436	•	•	•

ROOM THERMOSTATS

ROOM THERMOSTAT
SERIES TMA110

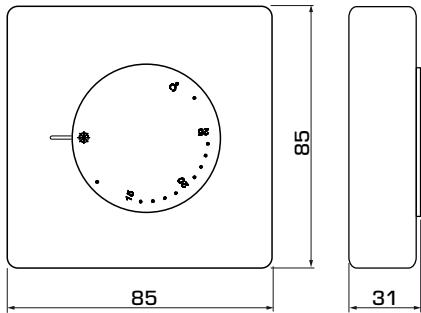

TMA111

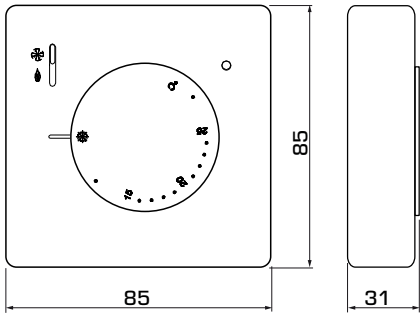

TMA112, TMA113

SERIES TMA110


Art. No.	Reference	Application	Regulating range	Weight [kg]	Note
18000100	TMA111	Heating	8-30°C	0.11	
18000200	TMA112	Heating	8-30°C	0.12	
18000300	TMA113	Heating or cooling	8-30°C	0.12	

ROOM THERMOSTATS


ROOM THERMOSTAT SERIES TMA110

WIRING


TMA111




TMA112

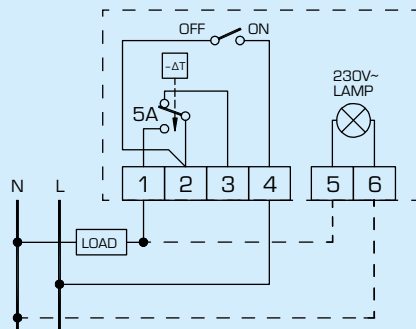


TMA113

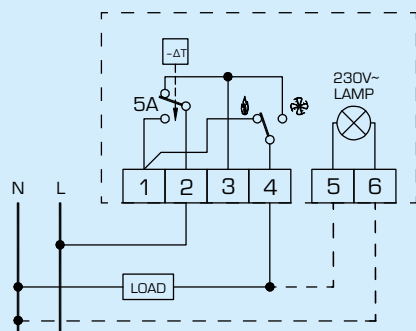


ELECTRICAL CONNECTION TO ESBE ACTUATORS

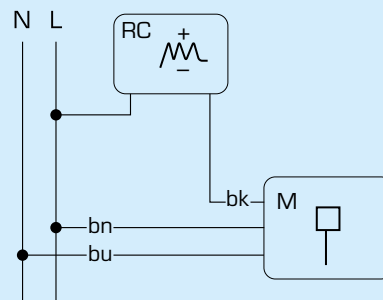

Series ARA600, 90, ARC300, VZC/VZD, MBA100

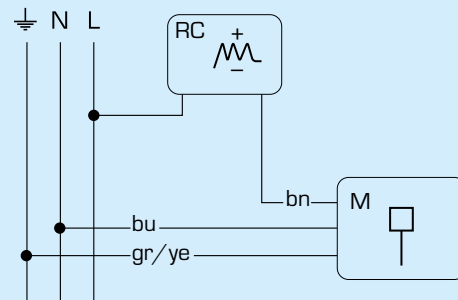

Series ZRS100

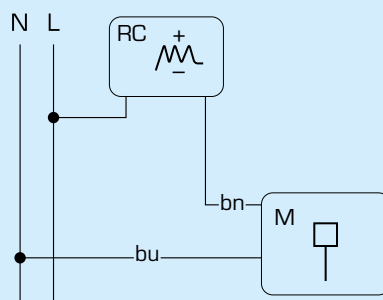

Series ARD100, ARD200, ALG400