


HL134/50


concealed trap assembly DN50 consisting of HL134.0, HL44, 2 water feeds solid brass and HL42



concealed trap assembly DN50 consisting of
HL134.0/50, HL44, 2 water feeds solid brass and HL42

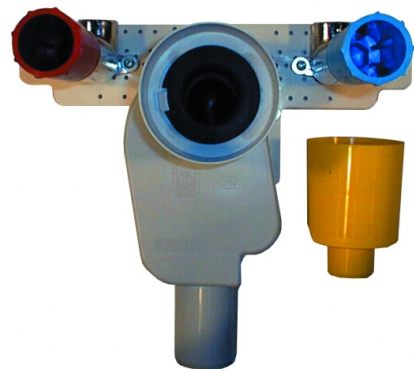

Techn. drawing

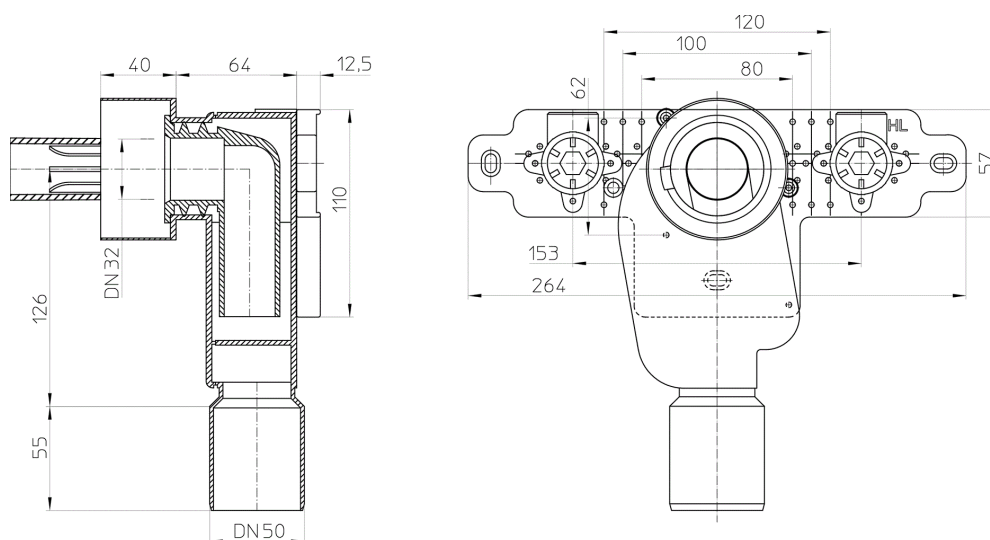

TECHNICAL DATA

material	PP	installation height
dimension	DN50	grate frame
capacity	0,38 l/sec	grate
weight	0,885	load class

EAN

9003076382347

inlet

standards

MAIN DATA**spare parts****HL0405.3E**

water feed solid brass 1/2'x1/2'

**HL134.0/50**

concealed trap DN50 with removable trap insert

**HL0134.1E**

trap insert

**HL42.B**

test plug 1/2' with vent. Blue

**HL042.1D**

gasket 1/2'

**HL42.R**

test plug 1/2' with vent. Red

**HL042.1D**

gasket 1/2'

**HL44**

mounting plate

attachment**HL134.1C**

90° angled brass-connector DN32, chrome plated

**HL134.1K**

90° angled plastic-connector DN32, white

**HL19T.2/30**

tee DN32x1 1/4' with HL19.2

**HL19T/30**

tee DN32x1 1/4' with HL19

**HL902T/30**

air admittance valve 1' with tee DN32x1 1/4'

PACKAGING DATA**PE-bag**

unit	1 [pcs.]
weight	0,898 [kg]
EAN/pack.	9003076382347
height/width/depth	140/200/270 [mm]

volume 0,001218 [m³]

carton

unit 10 [pcs.]

weight 9,22 [kg]

EAN/pack.

height/width/depth 320/250/410 [mm]

volume 0,0328 [m³]

DOWNLOADS

Foto Print	HL134_pr.tif	max.
Foto Web	HL134_B.jpg	640x480/300dpi
Foto Parts List	HL134_gr.jpg	150x150/72dpi
Techn. drawing	HL134_50_a.pdf	pdf
CAD	HL134_50_2_a.dxf	dxf